




NETMANAGEIT

# Intelligence Report

## Barracuda ESG Zero-Day Vulnerability

### (CVE-2023-2868) Exploited Globally by Aggressive and Skilled Actor, Suspected Links to China

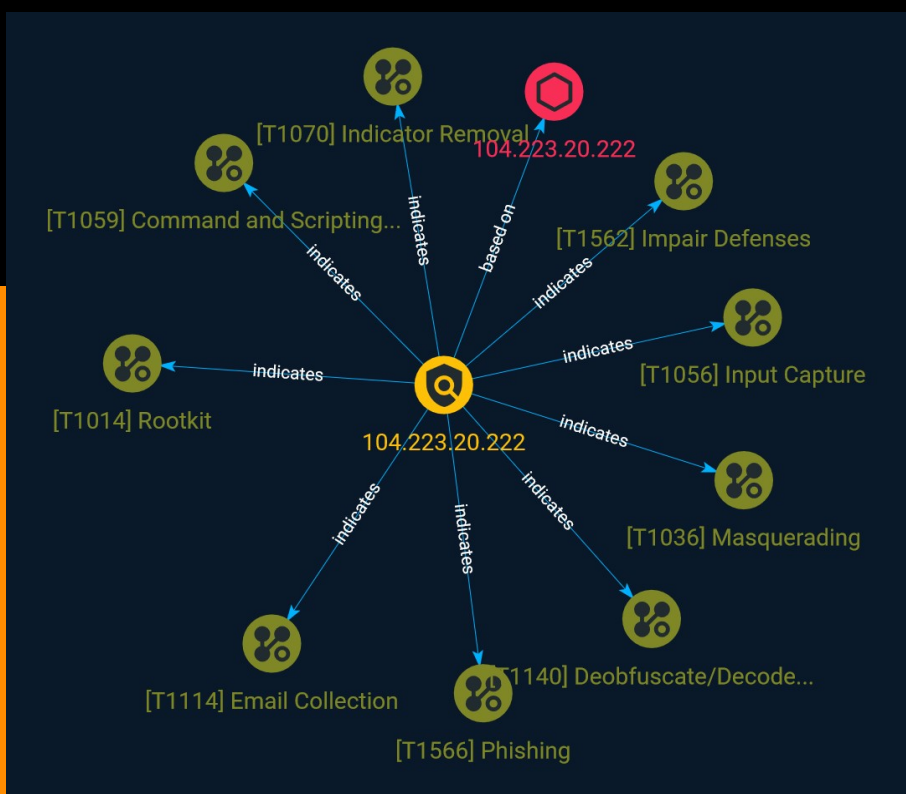

# Table of contents

---

## Overview

---

● Description	3
● Confidence	3

---

---

## Entities

---

● Attack-Pattern	4
● Indicator	10

---

---

## Observables

---

● IPv4-Addr	11
-------------	----

---

---

## External References

---

● External References	12
-----------------------	----

---

# Overview

## Description

On May 23, 2023, Barracuda announced that a zero-day vulnerability (CVE-2023-2868) in the Barracuda Email Security Gateway (ESG) had been exploited in-the-wild as early as October 2022 and that they engaged Mandiant to assist in the investigation. Through the investigation, Mandiant identified a suspected China-nexus actor, currently tracked as UNC4841, targeting a subset of Barracuda ESG appliances to utilize as a vector for espionage, spanning a multitude of regions and sectors. Mandiant assesses with high confidence that UNC4841 is an espionage actor behind this wide-ranging campaign in support of the People's Republic of China.

## Confidence

*This value represents the confidence in the correctness of the data contained within this report.*

15 / 100

# Attack-Pattern

**Name**

Input Capture

**ID**

T1056

**Description**

Adversaries may use methods of capturing user input to obtain credentials or collect information. During normal system usage, users often provide credentials to various different locations, such as login pages/portals or system dialog boxes. Input capture mechanisms may be transparent to the user (e.g. [Credential API Hooking](https://attack.mitre.org/techniques/T1056/004)) or rely on deceiving the user into providing input into what they believe to be a genuine service (e.g. [Web Portal Capture](https://attack.mitre.org/techniques/T1056/003)).

**Name**

Masquerading

**ID**

T1036

**Description**

Adversaries may attempt to manipulate features of their artifacts to make them appear legitimate or benign to users and/or security tools. Masquerading occurs when the name or location of an object, legitimate or malicious, is manipulated or abused for the sake of evading defenses and observation. This may include manipulating file metadata, tricking users into misidentifying the file type, and giving legitimate task or service names. Renaming abusible system utilities to evade security monitoring is also a form of [Masquerading](<https://attack.mitre.org/techniques/T1036>). (Citation: LOLBAS Main Site)

**Name**

Indicator Removal

**ID**

T1070

**Description**

Adversaries may delete or modify artifacts generated within systems to remove evidence of their presence or hinder defenses. Various artifacts may be created by an adversary or something that can be attributed to an adversary's actions. Typically these artifacts are used as defensive indicators related to monitored events, such as strings from downloaded files, logs that are generated from user actions, and other data analyzed by defenders. Location, format, and type of artifact (such as command or login history) are often specific to each platform. Removal of these indicators may interfere with event collection, reporting, or other processes used to detect intrusion activity. This may compromise the integrity of security solutions by causing notable events to go unreported. This activity may also impede forensic analysis and incident response, due to lack of sufficient data to determine what occurred.

**Name**

Phishing

**ID**

T1566

**Description**

Adversaries may send phishing messages to gain access to victim systems. All forms of phishing are electronically delivered social engineering. Phishing can be targeted, known as spearphishing. In spearphishing, a specific individual, company, or industry will be targeted by the adversary. More generally, adversaries can conduct non-targeted phishing, such as in mass malware spam campaigns. Adversaries may send victims emails containing malicious attachments or links, typically to execute malicious code on victim systems. Phishing may also be conducted via third-party services, like social media platforms. Phishing may also involve social engineering techniques, such as posing as a trusted source, as well as evasive techniques such as removing or manipulating emails or metadata/headers from compromised accounts being abused to send messages (e.g., [Email Hiding Rules](https://attack.mitre.org/techniques/T1564/008)).(Citation: Microsoft OAuth Spam 2022)(Citation: Palo Alto Unit 42 VBA Infostealer 2014) Another way to accomplish this is by forging or spoofing(Citation: Proofpoint-spoof) the identity of the sender which can be used to fool both the human recipient as well as automated security tools.(Citation: cyberproof-double-bounce) Victims may also receive phishing messages that instruct them to call a phone number where they are directed to visit a malicious URL, download malware,(Citation: sygnia Luna Month)(Citation: CISA Remote Monitoring and Management Software) or install adversary-accessible remote management tools onto their computer (i.e., [User Execution](https://attack.mitre.org/techniques/T1204)).(Citation: Unit42 Luna Moth)

**Name**

Rootkit

**ID**

T1014

**Description**

Adversaries may use rootkits to hide the presence of programs, files, network connections, services, drivers, and other system components. Rootkits are programs that hide the existence of malware by intercepting/hooksing and modifying operating system API calls that supply system information. (Citation: Symantec Windows Rootkits) Rootkits or rootkit enabling functionality may reside at the user or kernel level in the operating system or lower, to include a hypervisor, Master Boot Record, or [System Firmware](https://attack.mitre.org/techniques/T1542/001). (Citation: Wikipedia Rootkit) Rootkits have been

seen for Windows, Linux, and Mac OS X systems. (Citation: CrowdStrike Linux Rootkit)  
(Citation: BlackHat Mac OSX Rootkit)

**Name**

Impair Defenses

**ID**

T1562

**Description**

Adversaries may maliciously modify components of a victim environment in order to hinder or disable defensive mechanisms. This not only involves impairing preventative defenses, such as firewalls and anti-virus, but also detection capabilities that defenders can use to audit activity and identify malicious behavior. This may also span both native defenses as well as supplemental capabilities installed by users and administrators. Adversaries may also impair routine operations that contribute to defensive hygiene, such as blocking users from logging out of a computer or stopping it from being shut down. These restrictions can further enable malicious operations as well as the continued propagation of incidents.(Citation: Emotet shutdown) Adversaries could also target event aggregation and analysis mechanisms, or otherwise disrupt these procedures by altering other system components.

**Name**

Email Collection

**ID**

T1114

**Description**

Adversaries may target user email to collect sensitive information. Emails may contain sensitive data, including trade secrets or personal information, that can prove valuable to adversaries. Adversaries can collect or forward email from mail servers or clients.

### Name

Command and Scripting Interpreter

### ID

T1059

### Description

Adversaries may abuse command and script interpreters to execute commands, scripts, or binaries. These interfaces and languages provide ways of interacting with computer systems and are a common feature across many different platforms. Most systems come with some built-in command-line interface and scripting capabilities, for example, macOS and Linux distributions include some flavor of [Unix Shell](<https://attack.mitre.org/techniques/T1059/004>) while Windows installations include the [Windows Command Shell](<https://attack.mitre.org/techniques/T1059/003>) and [PowerShell](<https://attack.mitre.org/techniques/T1059/001>). There are also cross-platform interpreters such as [Python](<https://attack.mitre.org/techniques/T1059/006>), as well as those commonly associated with client applications such as [JavaScript](<https://attack.mitre.org/techniques/T1059/007>) and [Visual Basic](<https://attack.mitre.org/techniques/T1059/005>). Adversaries may abuse these technologies in various ways as a means of executing arbitrary commands. Commands and scripts can be embedded in [Initial Access](<https://attack.mitre.org/tactics/TA0001>) payloads delivered to victims as lure documents or as secondary payloads downloaded from an existing C2. Adversaries may also execute commands through interactive terminals/shells, as well as utilize various [Remote Services](<https://attack.mitre.org/techniques/T1021>) in order to achieve remote Execution. (Citation: Powershell Remote Commands)(Citation: Cisco IOS Software Integrity Assurance - Command History)(Citation: Remote Shell Execution in Python)

### Name

Deobfuscate/Decode Files or Information



**ID**

T1140

**Description**

Adversaries may use [Obfuscated Files or Information](<https://attack.mitre.org/techniques/T1027>) to hide artifacts of an intrusion from analysis. They may require separate mechanisms to decode or deobfuscate that information depending on how they intend to use it. Methods for doing that include built-in functionality of malware or by using utilities present on the system. One such example is the use of [certutil](<https://attack.mitre.org/software/S0160>) to decode a remote access tool portable executable file that has been hidden inside a certificate file.(Citation: Malwarebytes Targeted Attack against Saudi Arabia) Another example is using the Windows `copy /b`` command to reassemble binary fragments into a malicious payload.(Citation: Carbon Black Obfuscation Sept 2016) Sometimes a user's action may be required to open it for deobfuscation or decryption as part of [User Execution](<https://attack.mitre.org/techniques/T1204>). The user may also be required to input a password to open a password protected compressed/encrypted file that was provided by the adversary. (Citation: Volexity PowerDuke November 2016)

# Indicator

**Name**

104.223.20.222

**Description**

CC=US ASN=AS8100 ASN-QUADRANET-GLOBAL

**Pattern Type**

stix

**Pattern**

[ipv4-addr:value = '104.223.20.222']

# IPv4-Addr

## Value

104.223.20.222

# External References

- 
- <https://www.mandiant.com/resources/blog/barracuda-esg-exploited-globally>
- 
- <https://otx.alienvault.com/pulse/648b66983f37706379e0a660>