

NETMANAGEIT

Intelligence Report

New Technique Detected in an Open Source Supply Chain Attack

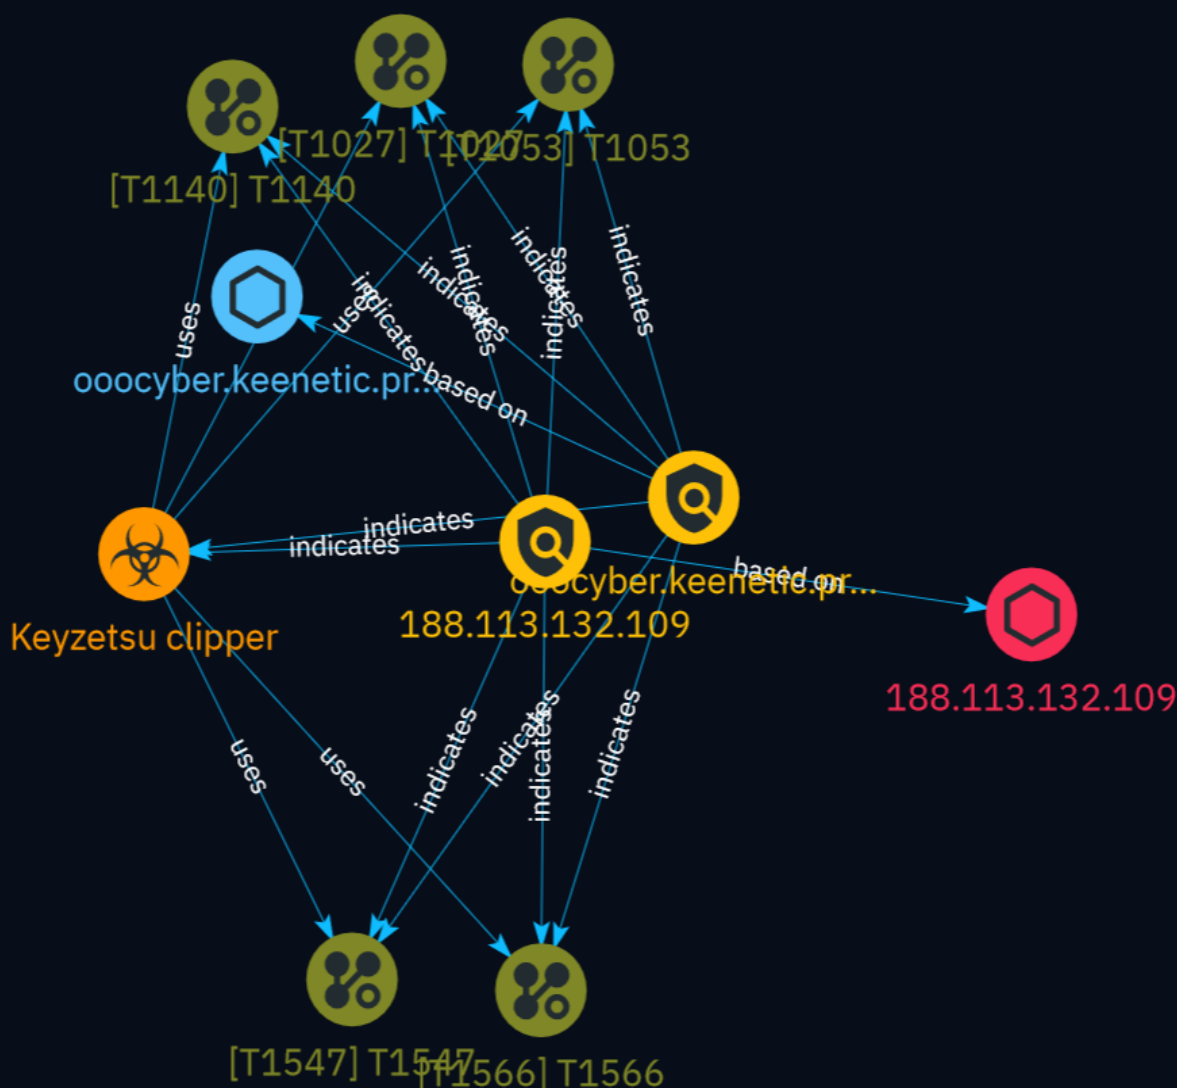


Table of contents

Overview

● Description	4
● Confidence	4
● Content	5

Entities

● Indicator	6
● Malware	8
● Attack-Pattern	9

Observables

● Hostname	14
● IPv4-Addr	15



External References

- External References

16

Overview

Description

A recent attack campaign was discovered in which threat actors manipulated GitHub search to boost the ranking of repositories containing hidden malware. The malware was concealed in Visual Studio project files and executed during build. The malware shared similarities with a cryptocurrency clipper and established persistence on Windows machines. Developers should watch for suspicious properties like high commit frequency and fake stargazers when using public code.

Confidence

This value represents the confidence in the correctness of the data contained within this report.

100 / 100

Content

N/A

Indicator

Name

ooocyber.keenetic.pro

Pattern Type

stix

Pattern

[hostname:value = 'ooocyber.keenetic.pro']

Name

188.113.132.109

Description

ISP: Sakhalin Cable Telesystems Ltd **OS:** - ----- Services: **80:**
`` HTTP/1.1 403 Forbidden Server: Web server Date: Sun, 24 Mar 2024 16:44:11 GMT Content-
Type: text/html Content-Length: 553 Connection: keep-alive X-Detail: 0x1210, insufficient
security level `` -----

Pattern Type

stix

Pattern

[ipv4-addr:value = '188.113.132.109']

Malware

Name

Keyzetsu clipper

Attack-Pattern

Name
T1027
ID
T1027
Description

Adversaries may attempt to make an executable or file difficult to discover or analyze by encrypting, encoding, or otherwise obfuscating its contents on the system or in transit. This is common behavior that can be used across different platforms and the network to evade defenses. Payloads may be compressed, archived, or encrypted in order to avoid detection. These payloads may be used during Initial Access or later to mitigate detection. Sometimes a user's action may be required to open and [Deobfuscate/Decode Files or Information](<https://attack.mitre.org/techniques/T1140>) for [User Execution](<https://attack.mitre.org/techniques/T1204>). The user may also be required to input a password to open a password protected compressed/encrypted file that was provided by the adversary. (Citation: Volexity PowerDuke November 2016) Adversaries may also use compressed or archived scripts, such as JavaScript. Portions of files can also be encoded to hide the plain-text strings that would otherwise help defenders with discovery. (Citation: Linux/Cdorked.A We Live Security Analysis) Payloads may also be split into separate, seemingly benign files that only reveal malicious functionality when reassembled. (Citation: Carbon Black Obfuscation Sept 2016) Adversaries may also abuse [Command Obfuscation](<https://attack.mitre.org/techniques/T1027/010>) to obscure commands executed from payloads or directly via [Command and Scripting Interpreter](<https://attack.mitre.org/techniques/T1059>). Environment variables, aliases, characters, and other platform/language specific semantics can be used to evade signature based detections and application control mechanisms. (Citation: FireEye Obfuscation June 2017) (Citation: FireEye Revoke-Obfuscation July 2017)(Citation: PaloAlto EncodedCommand March 2017)

Name

T1566

ID

T1566

Description

Adversaries may send phishing messages to gain access to victim systems. All forms of phishing are electronically delivered social engineering. Phishing can be targeted, known as spearphishing. In spearphishing, a specific individual, company, or industry will be targeted by the adversary. More generally, adversaries can conduct non-targeted phishing, such as in mass malware spam campaigns. Adversaries may send victims emails containing malicious attachments or links, typically to execute malicious code on victim systems. Phishing may also be conducted via third-party services, like social media platforms. Phishing may also involve social engineering techniques, such as posing as a

trusted source, as well as evasive techniques such as removing or manipulating emails or metadata/headers from compromised accounts being abused to send messages (e.g., [Email Hiding Rules](https://attack.mitre.org/techniques/T1564/008)).(Citation: Microsoft OAuth Spam 2022)(Citation: Palo Alto Unit 42 VBA Infostealer 2014) Another way to accomplish this is by forging or spoofing(Citation: Proofpoint-spoof) the identity of the sender which can be used to fool both the human recipient as well as automated security tools.(Citation: cyberproof-double-bounce) Victims may also receive phishing messages that instruct them to call a phone number where they are directed to visit a malicious URL, download malware,(Citation: sygnia Luna Month)(Citation: CISA Remote Monitoring and Management Software) or install adversary-accessible remote management tools onto their computer (i.e., [User Execution](https://attack.mitre.org/techniques/T1204)).(Citation: Unit42 Luna Moth)

Name

T1140

ID

T1140

Description

Adversaries may use [Obfuscated Files or Information](https://attack.mitre.org/techniques/T1027) to hide artifacts of an intrusion from analysis. They may require separate mechanisms to decode or deobfuscate that information depending on how they intend to use it. Methods for doing that include built-in functionality of malware or by using utilities present on the system. One such example is the use of [certutil](https://attack.mitre.org/software/S0160) to decode a remote access tool portable executable file that has been hidden inside a certificate file.(Citation: Malwarebytes Targeted Attack against Saudi Arabia) Another example is using the Windows `copy /b`` command to reassemble binary fragments into a malicious payload.(Citation: Carbon Black Obfuscation Sept 2016) Sometimes a user's action may be required to open it for deobfuscation or decryption as part of [User Execution](https://attack.mitre.org/techniques/T1204). The user may also be required to input a password to open a password protected compressed/ encrypted file that was provided by the adversary. (Citation: Volexity PowerDuke November 2016)

Name

T1053

ID

T1053

Description

Adversaries may abuse task scheduling functionality to facilitate initial or recurring execution of malicious code. Utilities exist within all major operating systems to schedule programs or scripts to be executed at a specified date and time. A task can also be scheduled on a remote system, provided the proper authentication is met (ex: RPC and file and printer sharing in Windows environments). Scheduling a task on a remote system typically may require being a member of an admin or otherwise privileged group on the remote system.(Citation: TechNet Task Scheduler Security) Adversaries may use task scheduling to execute programs at system startup or on a scheduled basis for persistence. These mechanisms can also be abused to run a process under the context of a specified account (such as one with elevated permissions/privileges). Similar to [System Binary Proxy Execution](<https://attack.mitre.org/techniques/T1218>), adversaries have also abused task scheduling to potentially mask one-time execution under a trusted system process. (Citation: ProofPoint Serpent)

Name

T1547

ID

T1547

Description

Adversaries may configure system settings to automatically execute a program during system boot or logon to maintain persistence or gain higher-level privileges on compromised systems. Operating systems may have mechanisms for automatically running a program on system boot or account logon.(Citation: Microsoft Run Key)(Citation: MSDN Authentication Packages)(Citation: Microsoft TimeProvider)(Citation: Cylance Reg Persistence Sept 2013)(Citation: Linux Kernel Programming) These mechanisms may

include automatically executing programs that are placed in specially designated directories or are referenced by repositories that store configuration information, such as the Windows Registry. An adversary may achieve the same goal by modifying or extending features of the kernel. Since some boot or logon autostart programs run with higher privileges, an adversary may leverage these to elevate privileges.

Hostname

Value

ooocyber.keenetic.pro

IPv4-Addr

Value

188.113.132.109

External References

-
- <https://checkmarx.com/blog/new-technique-to-trick-developers-detected-in-an-open-source-supply-chain-attack/>
-
- <https://otx.alienvault.com/pulse/6616fc06e73afd06071b73e5>